



# KP Propeller shaft type

## KP

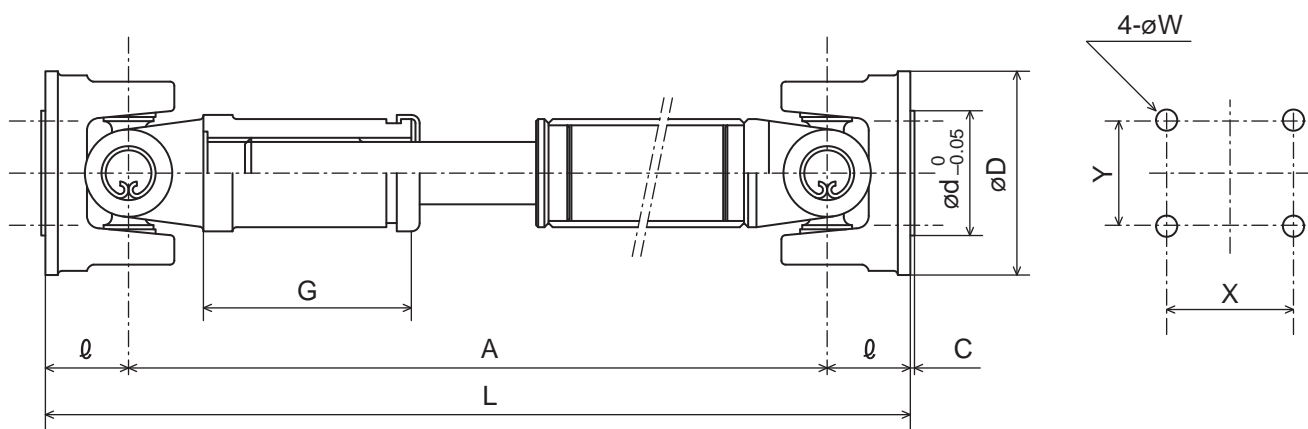

Dimension Name	d	C	L	Telescopic section	A	Ø	G	W	X	Y	Opposite flange diam. D	Allowable operating angle (°)	Allowable torque (N.m)
KP-04	60.2	1.5	353	+20 -20	280	36.5	80	10.2	61	51	97	15	400
KP-09	85	3	442	+20 -20	350	46	115	12.2	86.5	72.5	134	15	900
KP-20	90	5	624	+20 -20	480	72	135	14.2	118	75	176	15	2000

Inquire in advance about non-standard specifications, or indicate with a schematic drawing.

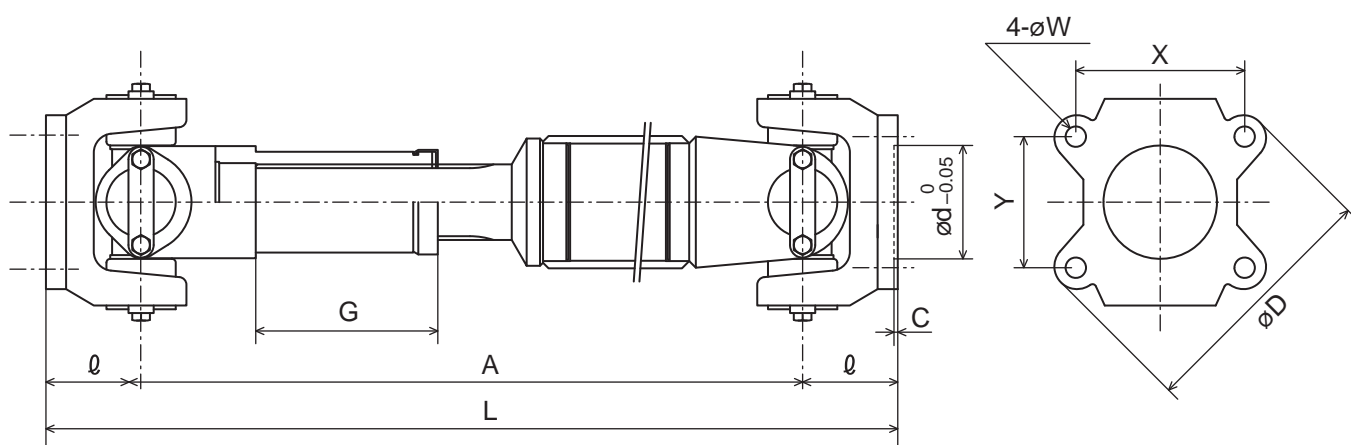

Dimension Name	d	C	L	Telescopic section	A	Ø	G	W	X	Y	Opposite flange diam. D	Allowable operating angle (°)	Allowable torque (N.m)
KP-40	90	5	601	+20 -20	450	75.5	140	16.2	134	104	206	15	4000

# KD Double type

Dimension Name	d	C	L	A	$\varnothing$	W	X	Y	Opposite flange diam. D	Allowable operating angle (°)	Allowable torque (N.m)
<b>KD-04</b>	60.2	1.5	156	83	36.5	10.2	61	51	97	15	400
<b>KD-09</b>	85	3	194	102	46	12.2	86.5	72.5	134	15	900
<b>KD-20</b>	90	5	298	154	72	14.2	118	75	176	15	2000

